
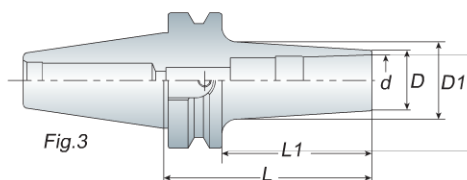
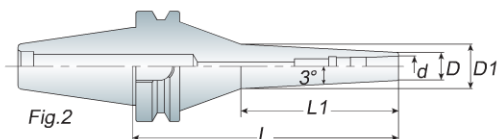


High Speed Collet Chuck


後拉式筒夾刀桿

ADS

BT / NT
series

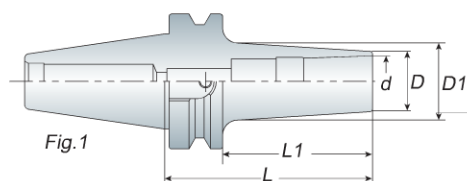

- ADS06, ADS08: 5mm Hex-Wrench
- ADS12, ADS16: 6mm Hex-Wrench
- ADS06, ADS08 使用 5mm 六角扳手
- ADS12, ADS16 使用 6mm 六角扳手

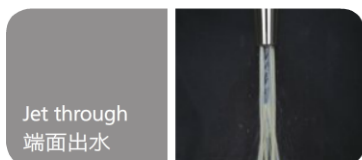

- ADS10 / ADS12 / ADS16 CL type upon your request.
For example: BT40 ADS12-090-CL
- ADS10 / ADS12 / ADS16 另有冷卻液貫穿型可供選擇，
請於訂購時於型號後面加 - CL
例 BT40 ADS12-090-CL

Features

- ADS tool holder is suitable for high-speed and high precision cutting. Tool holder designed without nut could reduce cutting vibration.
- Wrench is attached for each ADS tool holder.
- Balancing: 30,000 r.p.m G2.5
- ADS 刀桿適用於高速精密加工。無螺帽設計，降低加工時物件干涉
- 筒夾後拉式設計，操作簡易
- 每支 ADS 刀桿均附 1 支扳手
- 動平衡：30,000 r.p.m G2.5

Model No.	FIG.	Clamping Range (d)	D	D1	L1	L	Weight (kg)
BT30 ADS06-060	2	2~6	13	15.5	26	60	0.50
-090	2	2~6	13	18	50	90	0.60
ADS08-060	1	3~8	16	20.5	40	60	0.50
-075	1	3~8	16	22.5	55	75	0.60
ADS10-090	1	3~10	21	26	68	90	0.65
ADS12-080	1	3~12	23	31	60	80	0.65
-110	1	3~12	23	35	90	110	0.90
BT40 ADS06-060	2	2~6	13	16	26	60	1.10
-090	2	2~6	13	17.5	43	90	1.20
-120	2	2~6	13	19.5	60	120	1.30
-150	2	2~6	13	21	76	150	1.50
ADS08-065	1	3~8	16	20	40	65	1.10
-090	1	3~8	16	23	60	90	1.20
-120	1	3~8	16	25.5	80	120	1.30
-150	2	3~8	16	32	90	150	1.50
ADS10-090	1	3~10	21	26	63	90	1.20
-120	1	3~10	21	29	93	120	1.40
-150	1	3~10	21	32	123	150	1.70
ADS12-090	1	3~12	23	31	65	90	1.30
-120	1	3~12	23	38	95	120	1.70
-150	2	3~12	23	40	88	150	1.90
ADS16-095	1	5~16	28	35	70	95	1.40
-125	1	5~16	28	38	100	125	1.60
BT50 ADS06-150	1	2~6	13	24	115	150	4.00
ADS08-095	1	3~8	16	23	60	95	3.90
-110	1	3~8	16	25	75	110	3.90
ADS10-100	1	3~10	21	26	62	100	4.00
-150	1	3~10	21	31	112	150	4.20
ADS12-100	1	3~12	23	31	65	100	4.10
-150	1	3~12	23	38.5	115	150	4.40
ADS16-100	1	5~16	28	34.5	65	100	4.00
-125	1	5~16	28	35.5	90	125	4.20
BT40 ADS12D-075	3	3~12	30	37.5	50	75	1.60
-090	3	3~12	30	36.6	65	90	1.80
ADS16D-075	3	5~16	40	47.5	50	75	1.70
-090	3	5~16	40	46.5	65	90	1.90

Unit: mm

